



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

2681
#4
7/9/03
OH

Applicant: **Biagio Bisanti, et al.**
Serial No.: **10/071,919**
Filed: **02/08/2002**
For: **Radio Frequency Modulator**

Docket: **TI-32512**
Art Unit: **2681**
Examiner: **TBD**
Conf. No.: **2279**


TRANSMITTAL LETTER ACCOMPANYING CERTIFIED COPY OF
PRIORITY APPLICATION UNDER 35 U.S.C. § 119


Commissioner for Patents
Alexandria, VA 22313-1450

Dear Sir:

MAILING CERTIFICATE UNDER 37 C.F.R. § 1.8(a)

I hereby certify that this on this date, this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to the: Commissioner for Patents, Alexandria, VA 22313-1450.


Elizabeth Austin


Date 6/31/2003

Submitted herewith is a certified copy of European Patent Application No. 01400914.6, filed on April 9, 2001, in the European Patent Office and from which priority under 35 U.S.C. §119 is claimed for the above-identified application.

Please charge any fees necessary to the deposit account of Texas Instruments Incorporated, Account No. 20-0668. An original and two copies of this sheet are enclosed.

Respectfully submitted,



Ronald O. Neerings
Patent Attorney
Reg. No. 34,227

Texas Instruments Incorporated
Mail Station 3999
P.O. Box 655474
Dallas, TX 75265
(972) 917-5299

RECEIVED

JUL 07 2003

Technology Center 2600

Enclosed: Certified Copy of Priority Document



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung Certificate Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

01400914.6

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

05/02/02



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.: 01400914.6
Demande n°:

Anmeldetag:
Date of filing: 09/04/01
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
Texas Instruments Incorporated
Dallas, @Texas 75251
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
FM-PLL MODULATOR

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

H03C3/09

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

See for title page 1 of the description

TI-32512 EP

1

RADIO FREQUENCY MODULATOR

TECHNICAL FIELD OF THE INVENTION

This invention relates in general to the field of radio communications, and more specifically to a radio frequency modulator architecture suitable for any kind of phase or frequency modulation.

BACKGROUND TO THE INVENTION

A traditional radio frequency (RF) transmitter (TX) architecture is shown in FIG. 1 which can be used to transmit a frequency or phase modulated signal. When designing an RF transmitter, the transmitter designer needs to deal with a troubling trade-off between the modulation bandwidth (BW) and the TX loop BW. To avoid any distortion in the modulated signal, the TX loop BW has to be designed to be much larger than the modulation BW. This requires a transmitter architecture having a large comparison frequency for the TX loop in order to minimize the spurious problem linked to the large bandwidth of the TX loop, as well as the critical noise response of the TX loop for the wide band noise (inside the TX loop BW itself).

In U.S. Patent 5,953,895 a solution to the above noted problem is provided since in the approach described, the TX loop bandwidth and the modulation bandwidth are not related. The above noted patent attempts to solve the problem of distortion caused by the transmission PLL on the modulation spectrum with a method referred to as two-point modulation. The approach described however suffers from a major drawback presented by the critical noise response caused by the additional modulation added after the loop filter (item 403 in FIG. 1). In fact, the adding of an extra signal (in this case just part of the modulation) just in front of the VCO and after the loop filter, adds extra noise that is not be filtered out by the TX loop.

TI-32512 EP

2

The TX loop in a transmitter acts as a frequency translator and as a low pass filter for the modulating signal. To avoid any signal corruption it is important to keep the TX loop BW larger than the modulation BW. In addition, to be compliant with present day modulation standards, a very low noise PLL is required, making quite difficult its design and integration. A need thus exist for a modulation scheme that allows for narrowing of the TX loop BW to relax the spec of the TX loop as well as to allow for easier integration. Such a modulation scheme should provide for a stable and low noise modulator where the modulation bandwidth is uncorrelated to the TX loop bandwidth.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention, may best be understood by reference to the following description, taken in conjunction with the accompanying drawings, in the several figures of which like reference numerals identify like elements, and in which:

FIG. 1 shows a block diagram of prior art transmitter.

FIG. 2 shows a block diagram of a transmitter in accordance with the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

While the specification concludes with claims defining the features of the invention that are regarded as novel, it is believed that the invention will be better understood from a consideration of the following description in conjunction with the drawing figures, in which like reference numerals are carried forward.

A modulator architecture 200 is shown in FIG. 2 which provides for a stable and low noise modulator where the modulation bandwidth is uncorrelated to the TX loop bandwidth. In accordance with the invention, the output signal 228 coming out of the TX loop is demodulated by demodulator 208 and compared using comparator 206 with the modulating input signal 202. The output of the comparator 206 is then used to adjust a

TI-32512 EP

3

digital pre-emphasis filter 204. The digital pre-emphasis filter 204 avoids distortion of the modulating signal by providing a filter that has the inverse of the TX loop transfer function. The PLL (Tx loop) further includes a conventional phase/frequency detector and charge pump block 214, a low pass loop filter 216, oscillator 218 which in this embodiment is a voltage controlled oscillator (VCO), a filter 222 and divider 220.

The transfer function of the Tx loop of FIG. 2 is equal to:

$$T(s) = \frac{k_{\phi} \cdot H(s) \cdot K_v}{1 + \frac{s}{N \cdot s} \cdot K_{\phi} \cdot H(s) \cdot K_v}$$

In the above transfer function, the transfer function of the filter 222 and of the mixer 224 are not included because these have no distortion effects. So in accordance with the invention, the transfer function of the pre-emphasis filter 204 should be set equal to:

$$F(s) = \frac{1}{T(s)}$$

The approach provided by RF modulator 200 is inherently low noise since a narrow band can be selected for the TX loop which will also filter out the noise coming from the additional synthesizer 226 used to down convert the output signal 228. By using a digital pre-emphasis filter 204 as described above which has a filter characteristic substantially equal to the inverse of the transfer function of the PLL loop, the preconditioning of the signal 202 can be done in an easy and controllable fashion. In addition, by using a digital pre-emphasis filter 204, analog components are minimized allowing for easier integration of the modulator 200. The parameters that determine the TX loop transfer function can change over process and temperature; therefore, trimming of the pre-emphasis filter transfer function can be done in order to maintain the control over the accuracy of the modulation. Since in the preferred embodiment the pre-

TI-32512 EP

4

emphasis filter 204 is a digital filter it can be actively tuned by for example, a control circuit such as a controller (e.g., microprocessor or digital signal processor) to account for changes in the TX loop transfer function. The modulator 200 shown in FIG. 2 further includes a conventional direct digital synthesizer (DDS) 210 having an input port for receiving the output of the pre-emphasis filter 204 and a filter 212 for filtering the output of the DDS 210 prior to presentation of the signal to the phase/frequency detector and charge pump block 214.

The present invention provides for a modulator and method for controlling the accuracy of the modulation by preconditioning the modulating signal in the digital domain using a controlled digital pre-emphasis filter. The modulator is stable and provides for low noise, and the modulation bandwidth is not correlated to the TX loop bandwidth.

While the preferred embodiments of the invention have been illustrated and described, it will be clear that the invention is not so limited. Numerous modifications, changes, variations, substitutions and equivalents will occur to those skilled in the art without departing from the spirit and scope of the present invention as defined by the appended claims. For example, although the present invention has been described in association with the architecture shown in FIG. 2, the invention is applicable to other schemes that need the same kind of control on the modulating signal.

TI-32512 EP

5

CLAIMS

1. A radio frequency modulator, comprising:
 - a phase lock loop (PLL) having an input port for receiving a modulation signal and producing as an output signal a modulated RF signal at an output port;
 - a phase demodulator having an input port for receiving the modulated RF signal and having an output port for providing a phase information signal;
 - a comparator having a first input port for receiving the phase information signal and a second input port for receiving the modulation signal and an output port for providing an error signal; and
 - a pre-emphasis filter in response to receiving the error signal adjusts the modulation signal provided to the PLL.
2. A radio frequency modulator as defined in claim 1, wherein the pre-emphasis filter comprises a digital pre-emphasis filter.
3. A radio frequency modulator as defined in claim 1 or claim 2, further comprising a direct digital synthesizer (DDS) coupled between the pre-emphasis filter and the PLL.
4. A radio frequency modulator as defined in any preceding claim, wherein the PLL has a transfer function and the pre-emphasis filter preconditions the modulation signal with a filter response which is about the inverse of the PLL transfer function.
5. A radio frequency modulator as defined in any preceding claim, wherein the phase demodulator comprises a digital phase demodulator.

TI-32512 EP

6

6. A radio frequency modulator as defined in any preceding claim, wherein the modulation signal comprises a digital modulation signal.
7. A method of producing a stable and low noise modulator, comprising:
- (a) providing a phase lock loop (PLL) for receiving a modulation signal and producing a modulated RF signal;
 - (b) demodulating the modulated RF signal to produce a demodulated signal;
 - (c) comparing the demodulated signal with the modulation signal in order to provide an error signal; and
 - (d) using the error signal to precondition the modulation signal provided to the PLL using a pre-emphasis filter.
8. A method as defined in claim 7, wherein step (d) comprises preconditioning the modulation signal in the digital domain using a digital pre-emphasis filter.
9. A method as defined in claim 7 or claim 8, wherein the PLL has a transfer function and the pre-emphasis filter has a filter response approximately the inverse of the PLL transfer function.
10. A digital modulator for use in a radio frequency transmitter, comprising:
- a phase-lock-loop (PLL) loop producing as an output signal a modulated RF signal;
 - a phase demodulator having an input port for receiving the modulated RF signal and having an output port for providing a phase information signal;

TI-32512 EP

7

RADIO FREQUENCY MODULATOR

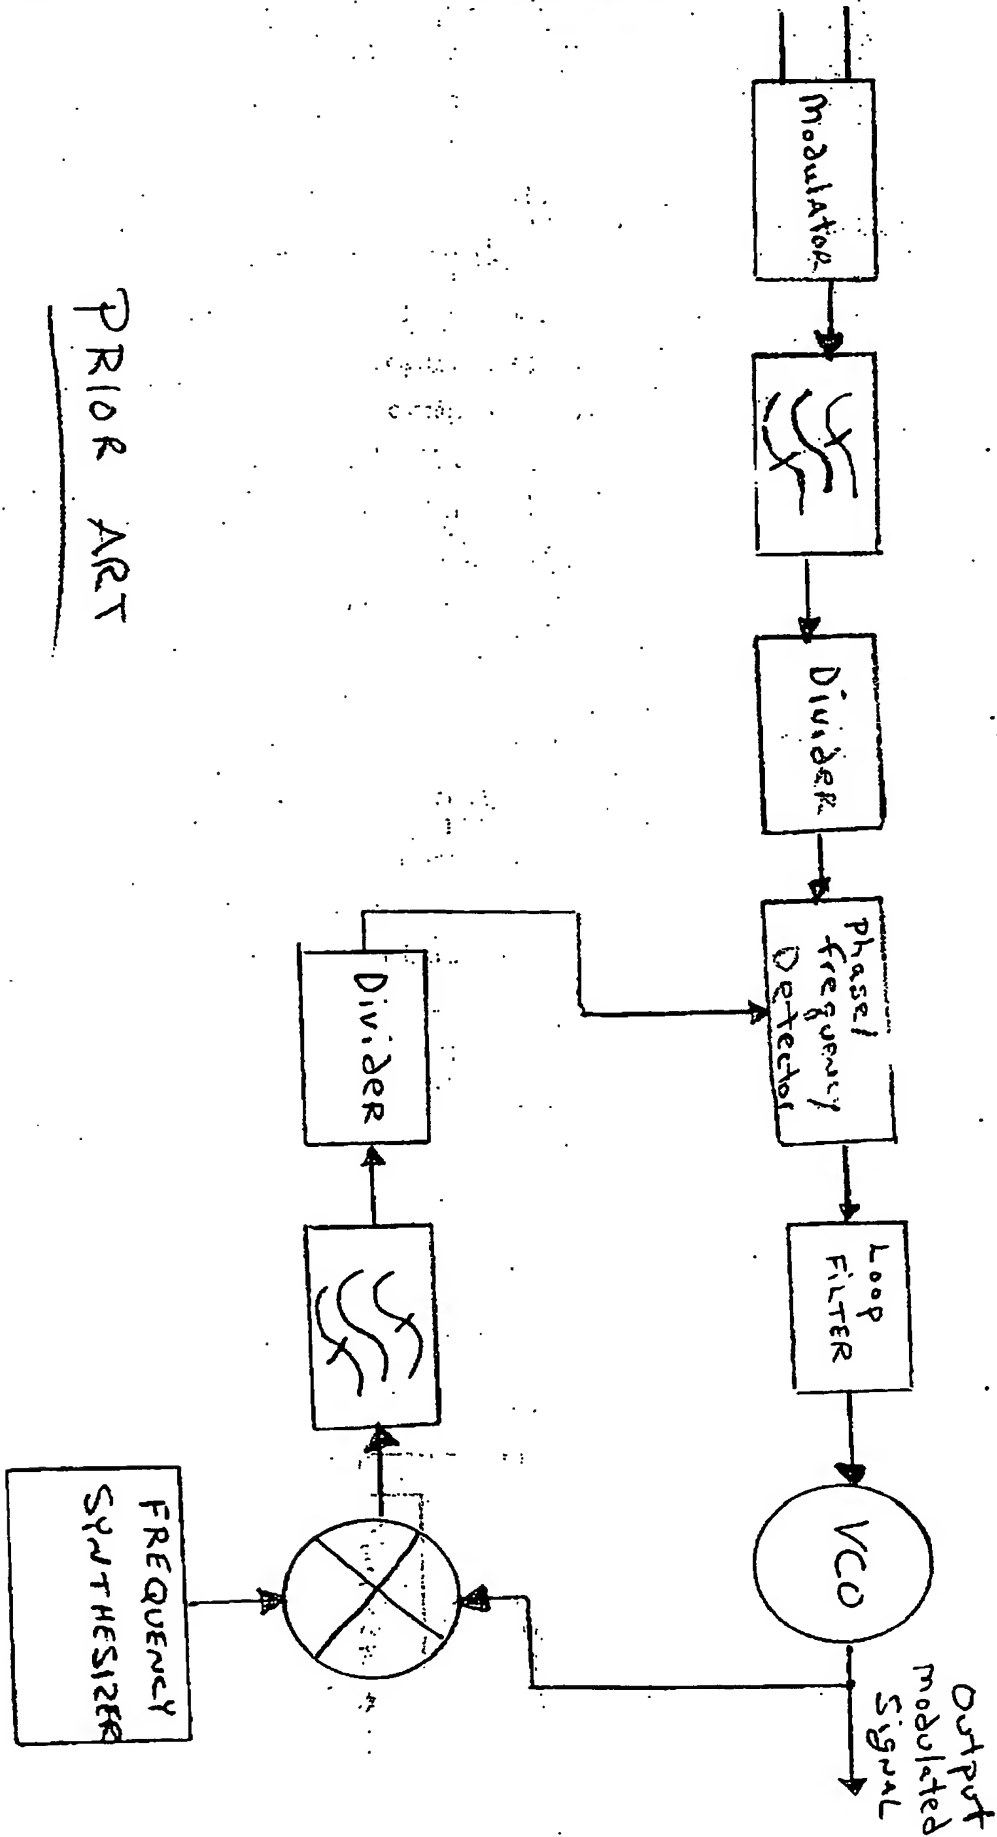
ABSTRACT OF THE DISCLOSURE

A transmitter architecture (200) provides for a stable and low noise modulator, where the modulation bandwidth is uncorrelated to the TX loop bandwidth. The output signal (228) of the TX loop is demodulated by a demodulator (208) and the demodulated signal is compared by a comparator (206) with the modulating input signal (202). The output of the comparator is then used to adjust a digital pre-emphasis filter (204) which preconditions the modulating input signal (202) in the digital domain. The preconditioning approach of the present invention provides for low noise because the transmitter designer can chose a narrow band for the TX loop which will also filter out the noise coming from the additional synthesizer (226) used to down convert the input signal.

Figure 2.

100: 200: 204: 206: 208: 210: 212: 214: 216: 218: 220: 222: 224: 226: 228: 230: 232: 234: 236: 238: 240: 242: 244: 246: 248: 250: 252: 254: 256: 258: 260: 262: 264: 266: 268: 270: 272: 274: 276: 278: 280: 282: 284: 286: 288: 290: 292: 294: 296: 298: 300: 302: 304: 306: 308: 310: 312: 314: 316: 318: 320: 322: 324: 326: 328: 330: 332: 334: 336: 338: 340: 342: 344: 346: 348: 350: 352: 354: 356: 358: 360: 362: 364: 366: 368: 370: 372: 374: 376: 378: 380: 382: 384: 386: 388: 390: 392: 394: 396: 398: 400: 402: 404: 406: 408: 410: 412: 414: 416: 418: 420: 422: 424: 426: 428: 430: 432: 434: 436: 438: 440: 442: 444: 446: 448: 450: 452: 454: 456: 458: 460: 462: 464: 466: 468: 470: 472: 474: 476: 478: 480: 482: 484: 486: 488: 490: 492: 494: 496: 498: 500: 502: 504: 506: 508: 510: 512: 514: 516: 518: 520: 522: 524: 526: 528: 530: 532: 534: 536: 538: 540: 542: 544: 546: 548: 550: 552: 554: 556: 558: 560: 562: 564: 566: 568: 570: 572: 574: 576: 578: 580: 582: 584: 586: 588: 590: 592: 594: 596: 598: 600: 602: 604: 606: 608: 610: 612: 614: 616: 618: 620: 622: 624: 626: 628: 630: 632: 634: 636: 638: 640: 642: 644: 646: 648: 650: 652: 654: 656: 658: 660: 662: 664: 666: 668: 670: 672: 674: 676: 678: 680: 682: 684: 686: 688: 690: 692: 694: 696: 698: 700: 702: 704: 706: 708: 710: 712: 714: 716: 718: 720: 722: 724: 726: 728: 730: 732: 734: 736: 738: 740: 742: 744: 746: 748: 750: 752: 754: 756: 758: 760: 762: 764: 766: 768: 770: 772: 774: 776: 778: 780: 782: 784: 786: 788: 790: 792: 794: 796: 798: 800: 802: 804: 806: 808: 810: 812: 814: 816: 818: 820: 822: 824: 826: 828: 830: 832: 834: 836: 838: 840: 842: 844: 846: 848: 850: 852: 854: 856: 858: 860: 862: 864: 866: 868: 870: 872: 874: 876: 878: 880: 882: 884: 886: 888: 890: 892: 894: 896: 898: 900: 902: 904: 906: 908: 910: 912: 914: 916: 918: 920: 922: 924: 926: 928: 930: 932: 934: 936: 938: 940: 942: 944: 946: 948: 950: 952: 954: 956: 958: 960: 962: 964: 966: 968: 970: 972: 974: 976: 978: 980: 982: 984: 986: 988: 990: 992: 994: 996: 998: 1000: 1002: 1004: 1006: 1008: 1010: 1012: 1014: 1016: 1018: 1020: 1022: 1024: 1026: 1028: 1030: 1032: 1034: 1036: 1038: 1040: 1042: 1044: 1046: 1048: 1050: 1052: 1054: 1056: 1058: 1060: 1062: 1064: 1066: 1068: 1070: 1072: 1074: 1076: 1078: 1080: 1082: 1084: 1086: 1088: 1090: 1092: 1094: 1096: 1098: 1100: 1102: 1104: 1106: 1108: 1110: 1112: 1114: 1116: 1118: 1120: 1122: 1124: 1126: 1128: 1130: 1132: 1134: 1136: 1138: 1140: 1142: 1144: 1146: 1148: 1150: 1152: 1154: 1156: 1158: 1160: 1162: 1164: 1166: 1168: 1170: 1172: 1174: 1176: 1178: 1180: 1182: 1184: 1186: 1188: 1190: 1192: 1194: 1196: 1198: 1200: 1202: 1204: 1206: 1208: 1210: 1212: 1214: 1216: 1218: 1220: 1222: 1224: 1226: 1228: 1230: 1232: 1234: 1236: 1238: 1240: 1242: 1244: 1246: 1248: 1250: 1252: 1254: 1256: 1258: 1260: 1262: 1264: 1266: 1268: 1270: 1272: 1274: 1276: 1278: 1280: 1282: 1284: 1286: 1288: 1290: 1292: 1294: 1296: 1298: 1300: 1302: 1304: 1306: 1308: 1310: 1312: 1314: 1316: 1318: 1320: 1322: 1324: 1326: 1328: 1330: 1332: 1334: 1336: 1338: 1340: 1342: 1344: 1346: 1348: 1350: 1352: 1354: 1356: 1358: 1360: 1362: 1364: 1366: 1368: 1370: 1372: 1374: 1376: 1378: 1380: 1382: 1384: 1386: 1388: 1390: 1392: 1394: 1396: 1398: 1400: 1402: 1404: 1406: 1408: 1410: 1412: 1414: 1416: 1418: 1420: 1422: 1424: 1426: 1428: 1430: 1432: 1434: 1436: 1438: 1440: 1442: 1444: 1446: 1448: 1450: 1452: 1454: 1456: 1458: 1460: 1462: 1464: 1466: 1468: 1470: 1472: 1474: 1476: 1478: 1480: 1482: 1484: 1486: 1488: 1490: 1492: 1494: 1496: 1498: 1500: 1502: 1504: 1506: 1508: 1510: 1512: 1514: 1516: 1518: 1520: 1522: 1524: 1526: 1528: 1530: 1532: 1534: 1536: 1538: 1540: 1542: 1544: 1546: 1548: 1550: 1552: 1554: 1556: 1558: 1560: 1562: 1564: 1566: 1568: 1570: 1572: 1574: 1576: 1578: 1580: 1582: 1584: 1586: 1588: 1590: 1592: 1594: 1596: 1598: 1600: 1602: 1604: 1606: 1608: 1610: 1612: 1614: 1616: 1618: 1620: 1622: 1624: 1626: 1628: 1630: 1632: 1634: 1636: 1638: 1640: 1642: 1644: 1646: 1648: 1650: 1652: 1654: 1656: 1658: 1660: 1662: 1664: 1666: 1668: 1670: 1672: 1674: 1676: 1678: 1680: 1682: 1684: 1686: 1688: 1690: 1692: 1694: 1696: 1698: 1700: 1702: 1704: 1706: 1708: 1710: 1712: 1714: 1716: 1718: 1720: 1722: 1724: 1726: 1728: 1730: 1732: 1734: 1736: 1738: 1740: 1742: 1744: 1746: 1748: 1750: 1752: 1754: 1756: 1758: 1760: 1762: 1764: 1766: 1768: 1770: 1772: 1774: 1776: 1778: 1780: 1782: 1784: 1786: 1788: 1790: 1792: 1794: 1796: 1798: 1800: 1802: 1804: 1806: 1808: 1810: 1812: 1814: 1816: 1818: 1820: 1822: 1824: 1826: 1828: 1830: 1832: 1834: 1836: 1838: 1840: 1842: 1844: 1846: 1848: 1850: 1852: 1854: 1856: 1858: 1860: 1862: 1864: 1866: 1868: 1870: 1872: 1874: 1876: 1878: 1880: 1882: 1884: 1886: 1888: 1890: 1892: 1894: 1896: 1898: 1900: 1902: 1904: 1906: 1908: 1910: 1912: 1914: 1916: 1918: 1920: 1922: 1924: 1926: 1928: 1930: 1932: 1934: 1936: 1938: 1940: 1942: 1944: 1946: 1948: 1950: 1952: 1954: 1956: 1958: 1960: 1962: 1964: 1966: 1968: 1970: 1972: 1974: 1976: 1978: 1980: 1982: 1984: 1986: 1988: 1990: 1992: 1994: 1996: 1998: 2000: 2002: 2004: 2006: 2008: 2010: 2012: 2014: 2016: 2018: 2020: 2022: 2024: 2026: 2028: 2030: 2032: 2034: 2036: 2038: 2040: 2042: 2044: 2046: 2048: 2050: 2052: 2054: 2056: 2058: 2060: 2062: 2064: 2066: 2068: 2070: 2072: 2074: 2076: 2078: 2080: 2082: 2084: 2086: 2088: 2090: 2092: 2094: 2096: 2098: 2100: 2102: 2104: 2106: 2108: 2110: 2112: 2114: 2116: 2118: 2120: 2122: 2124: 2126: 2128: 2130: 2132: 2134: 2136: 2138: 2140: 2142: 2144: 2146: 2148: 2150: 2152: 2154: 2156: 2158: 2160: 2162: 2164: 2166: 2168: 2170: 2172: 2174: 2176: 2178: 2180: 2182: 2184: 2186: 2188: 2190: 2192: 2194: 2196: 2198: 2200: 2202: 2204: 2206: 2208: 2210: 2212: 2214: 2216: 2218: 2220: 2222: 2224: 2226: 2228: 2230: 2232: 2234: 2236: 2238: 2240: 2242: 2244: 2246: 2248: 2250: 2252: 2254: 2256: 2258: 2260: 2262: 2264: 2266: 2268: 2270: 2272: 2274: 2276: 2278: 2280: 2282: 2284: 2286: 2288: 2290: 2292: 2294: 2296: 2298: 2300: 2302: 2304: 2306: 2308: 2310: 2312: 2314: 2316: 2318: 2320: 2322: 2324: 2326: 2328: 2330: 2332: 2334: 2336: 2338: 2340: 2342: 2344: 2346: 2348: 2350: 2352: 2354: 2356: 2358: 2360: 2362: 2364: 2366: 2368: 2370: 2372: 2374: 2376: 2378: 2380: 2382: 2384: 2386: 2388: 2390: 2392: 2394: 2396: 2398: 2400: 2402: 2404: 2406: 2408: 2410: 2412: 2414: 2416: 2418: 2420: 2422: 2424: 2426: 2428: 2430: 2432: 2434: 2436: 2438: 2440: 2442: 2444: 2446: 2448: 2450: 2452: 2454: 2456: 2458: 2460: 2462: 2464: 2466: 2468: 2470: 2472: 2474: 2476: 2478: 2480: 2482: 2484: 2486: 2488: 2490: 2492: 2494: 2496: 2498: 2500: 2502: 2504: 2506: 2508: 2510: 2512: 2514: 2516: 2518: 2520: 2522: 2524: 2526: 2528: 2530: 2532: 2534: 2536: 2538: 2540: 2542: 2544: 2546: 2548: 2550: 2552: 2554: 2556: 2558: 2560: 2562: 2564: 2566: 2568: 2570: 2572: 2574: 2576: 2578: 2580: 2582: 2584: 2586: 2588: 2590: 2592: 2594: 2596: 2598: 2600: 2602: 2604: 2606: 2608: 2610: 2612: 2614: 2616: 2618: 2620: 2622: 2624: 2626: 2628: 2630: 2632: 2634: 2636: 2638: 2640: 2642: 2644: 2646: 2648: 2650: 2652: 2654: 2656: 2658: 2660: 2662: 2664: 2666: 2668: 2670: 2672: 2674: 2676: 2678: 2680: 2682: 2684: 2686: 2688: 2690: 2692: 2694: 2696: 2698: 2700: 2702: 2704: 2706: 2708: 2710: 2712: 2714: 2716: 2718: 2720: 2722: 2724: 2726: 2728: 2730: 2732: 2734: 2736: 2738: 2740: 2742: 2744: 2746: 2748: 2750: 2752: 2754: 2756: 2758: 2760: 2762: 2764: 2766: 2768: 2770: 2772: 2774: 2776: 2778: 2780: 2782: 2784: 2786: 2788: 2790: 2792: 2794: 2796: 2798: 2800: 2802: 2804: 2806: 2808: 2810: 2812: 2814: 2816: 2818: 2820: 2822: 2824: 2826: 2828: 2830: 2832: 2834: 2836: 2838: 2840: 2842: 2844: 2846: 2848: 2850: 2852: 2854: 2856: 2858: 2860: 2862: 2864: 2866: 2868: 2870: 2872: 2874: 2876: 2878: 2880: 2882: 2884: 2886: 2888: 2890: 2892: 2894: 2896: 2898: 2900: 2902: 2904: 2906: 2908: 2910: 2912: 2914: 2916: 2918: 2920: 2922: 2924: 2926: 2928: 2930: 2932: 2934: 2936: 2938: 2940: 2942: 2944: 2946: 2948: 2950: 2952: 2954: 2956: 2958: 2960: 2962: 2964: 2966: 2968: 2970: 2972: 2974: 2976: 2978: 2980: 2982: 2984: 2986: 2988: 2990: 2992: 2994: 2996: 2998: 3000: 3002: 3004: 3006: 3008: 3010: 3012: 3014: 3016: 3018: 3020: 3022: 3024: 3026: 3028: 3030: 3032: 3034: 3036: 3038: 3040: 3042: 3044: 3046: 3048: 3050: 3052: 3054: 3056: 3058: 3060: 3062: 3064: 3066: 3068: 3070: 3072: 3074: 3076: 3078: 3080: 3082: 3084: 3086: 3088: 3090: 3092: 3094: 3096: 3098: 3100: 3102: 3104: 3106: 3108: 3110: 3112: 3114: 3116: 3118: 3120: 3122: 3124: 3126: 3128: 3130: 3132: 3134: 3136: 3138: 3140: 3142: 3144: 3146: 3148: 3150: 3152: 3154: 3156: 3158: 3160: 3162: 3164: 3166: 3168: 3170: 3172: 3174: 3176: 3178: 3180: 3182: 3184: 3186: 3188: 3190: 3192: 3194: 3196: 3198: 3200: 3202: 3204: 3206: 3208: 3210: 3212: 3214: 3216: 3218: 3220: 3222: 3224: 3226: 3228: 3230: 3232: 3234: 3236: 3238: 3240: 3242: 3244: 3246: 3248: 3250: 3252: 3254: 3256: 3258: 3260: 3262: 3264: 3266: 3268: 3270: 3272: 3274: 3276: 3278: 3280: 3282: 3284: 3286: 3288: 3290: 3292: 3294: 3296: 3298: 3300: 3302: 3304: 3306: 3308: 3310: 3312: 3314: 3316: 3318: 3320: 3322: 3324: 3326: 3328: 3330: 3332: 3334: 3336: 3338: 3340: 3342: 3344: 3346: 3348: 3350: 3352: 3354: 3356: 3358: 3360: 3362: 3364: 3366: 3368: 3370: 3372: 3374: 3376: 3378: 3380: 3382: 3384: 3386: 3388: 3390: 3392: 3394: 3396: 3398: 3400: 3402: 3404: 3406: 3408: 3410: 3412: 3414: 3416: 3418: 3420: 3422: 3424: 3426: 3428: 3430: 3432: 3434: 3436: 3438: 3440: 3442: 3444: 3446: 3448: 3450: 3452: 3454: 3456: 3458: 3460: 3462: 3464: 3466: 3468: 3470: 3472: 3474: 3476: 3478: 3480: 3482: 3484: 3486: 3488: 3490: 3492: 3494: 3496: 3498: 3500: 3502: 3504: 3506: 3508: 3510: 3512: 3514: 3516: 3518: 3520: 3522: 3524: 3526: 3528: 3530: 3532: 3534: 3536: 3538: 3540: 3542: 3544: 3546: 3548: 3550: 3552: 3554: 3556: 3558: 3560: 3562: 3564: 3566: 3568: 3570: 3572: 3574: 3576: 3578: 3580: 3582: 3584: 3586: 3588: 3590: 3592: 3594: 3596: 3598: 3600: 3602: 3604: 3606: 3608: 3610: 3612: 3614: 3616: 3618: 3620: 3622: 3624: 3626: 3628: 3630: 3632: 3634: 3636: 3638: 3640: 3642: 3644: 3646: 3648: 3650: 3652: 3654: 3656: 3658: 3660: 3662: 3664: 3666: 3668: 3670: 3672: 3674: 3676: 3678: 3680: 3682: 3684: 3686: 3688: 3690: 3692: 3694: 3696: 3698: 3700: 3702: 3704: 3706: 3708: 3710: 3712: 3714: 3716: 3718: 3720: 3722: 3724: 3726: 3728: 3730: 3732: 3734: 3736: 3738: 3740: 3742: 3744: 3746: 3748: 3750: 3752: 3754: 3756: 3758: 3760: 3762: 3764: 3766: 3768: 3770: 3772: 3774: 3776: 3778: 3780: 3782: 3784: 3786: 3788: 3790: 3792: 3794: 3796: 3798: 3800: 3802: 3804: 3806: 3808: 3810: 3812: 3814: 3816: 3818: 3820: 3822: 3824: 3826: 3828: 3830: 3832: 3834: 3836: 3838: 3840: 3842: 3844: 3846: 3848: 3850: 3852: 3854: 3856: 3858: 3860: 3862: 3864: 3866: 3868: 3870: 3872: 3874: 3876: 3878: 3880: 3882: 3884: 3886: 3888: 3890: 3892: 3894: 3896: 3898: 3900: 3902: 3904: 3906: 3908: 3910: 3912: 3914: 3916: 3918: 3920: 3922: 3924: 3926: 3928: 3930: 3932: 3934: 3936: 3938: 3940: 3942: 3944: 3946: 3948: 3950: 3952: 3954: 3956: 3958: 3960: 3962: 3964: 3966: 3968: 3970: 3972: 3974: 3976: 3978: 3980: 3982: 3984: 3986: 3988: 3990: 3992: 3994: 3996: 3998: 4000: 4002: 4004: 4006: 4008: 4010: 4012: 4014: 4016: 4018: 4020: 4022: 4024: 4026: 4028: 4030: 4032: 4034: 4036: 4038: 4040: 4042: 4044: 4046: 4048: 4050: 4052: 4054: 4056: 4058: 4060: 4062: 4064: 4066: 4068: 4070: 4072: 4074: 4076: 4078: 4080: 4082: 4084: 4086: 4088: 4090: 4092: 4094: 4096: 4098: 4100: 4102: 4104: 4106: 4108: 4110: 4112: 4114: 4116: 4118: 4120: 4122: 4124: 4126: 4128: 4130: 4132: 4134: 4136: 4138: 4140: 4142: 4144: 4146: 4148: 4150: 4152: 4154: 4156: 4158: 4160: 4162: 4164: 4166: 4168: 4170: 4172: 4174: 4176: 4178: 4180: 4182: 4184: 4186: 4188: 4190: 4192: 4194: 4196: 4198: 4200: 4202: 4204: 4206: 4208: 4210: 4212: 4214: 4216: 4218: 4220: 4222: 4224: 4226: 4228: 4230: 4232: 4234: 4236: 4238: 4240: 4242: 4244: 4246: 4248: 4250: 4252: 4254: 4256: 4258: 4260: 4262: 4264: 4266: 4268: 4270: 4272: 4274: 4276: 4278: 4280: 4282: 4284:

F/6.1



PRIOR ART

